

System Description

Procrete Flake Flooring Systems makes light work of damaged decrepit and chipped floor surfaces its self level properties means that transforming unsightly concrete into a masterpiece could not be faster or more cost effective.

Procrete Flake Flooring Systems can be used in wide range of areas such as garages, warehouses, wash rooms, toilets and high traffic areas. When applied the flake bridges all small cracks giving you a seamless floor which is easy to clean and maintain to keep up with OH&S compliance issues.

There are a large range of colours available to meet your decor requirements and all of the epoxy floors can be easily cleaned with mild detergents and are extremely stain resistant.

Slip reducing additives can be applied in the top coat to help prevent unnecessary slip and falls.

Features

- » Seamless surface
- » Graffiti resistant
- » Water resistant
- » Great for high traffic areas
- » Will not harbor bacteria
- » High resistance to wearing
- » Unlimited flakes

Typical Areas of Use

- » Schools
- » Toilets
- » Garages
- » Workshops
- » Stairways
- » Laboratories
- » Kitchens
- » Homes
- » Hotels
- » Canteens





Procrete Flake Flooring System's




System EF

Procrete Flake Flooring System EF is an environmentally friendly system with all the products specified in the system containing Low VOC's. Typically used where solvent based products cannot be due to the VOC contents.



System CR

Procrete Flake Flooring System CR is a high chemical resistant flooring system. Products used in the system are specified due to their chemical resistant properties. The System is used in workshop and factory areas where there is a high possibility of chemical spills.

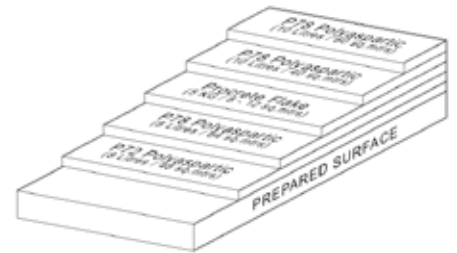


System QD


Procrete Flake Flooring System QD is a quick drying system. The products specified in this system all have a fast drying time. This system is used when fast project times are imperative.

	System EF	System CR	System QD
Prime Coat	SV50	SV100	P72
Base Coat	SV50	SV100	P78
Decorative Coat	Procrete Flake	Procrete Flake	Procrete Flake
Top Coat(s)	SV35	SV40	P78


Note: For individual product technical data and application information please go to www.on-crete.com.au/pages/support.php

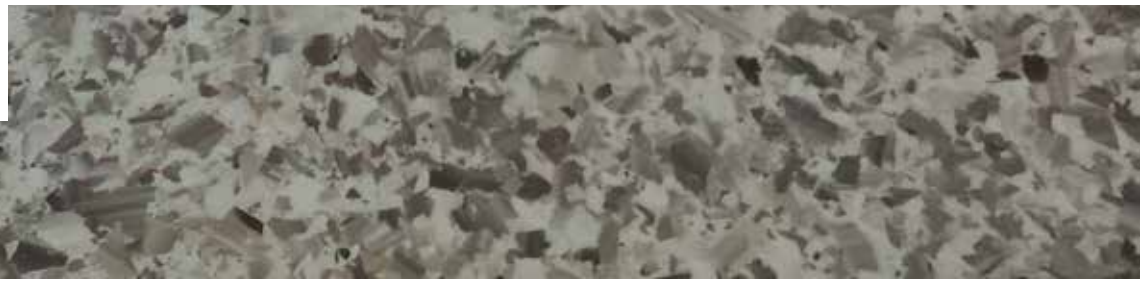

MARBLETONE COLOUR RANGE



Black Marble (L)



Black Marble (S)




Caramel Marble (L)




Caramel Marble (S)



Tan Marble (L)



Grey Metal Marble (L)



Grey Metal Marble (S)



Heritage Marble (L)



Heritage Marble (S)



Tan Marble (S)




Midnight Marble (L)




Midnight Marble (S)



Pine Marble (L)




Pine Marble (S)



Terracotta Marble (L)




Richmond Marble (L)




Richmond Marble (S)



Rusty Marble (L)




Rusty Marble (S)

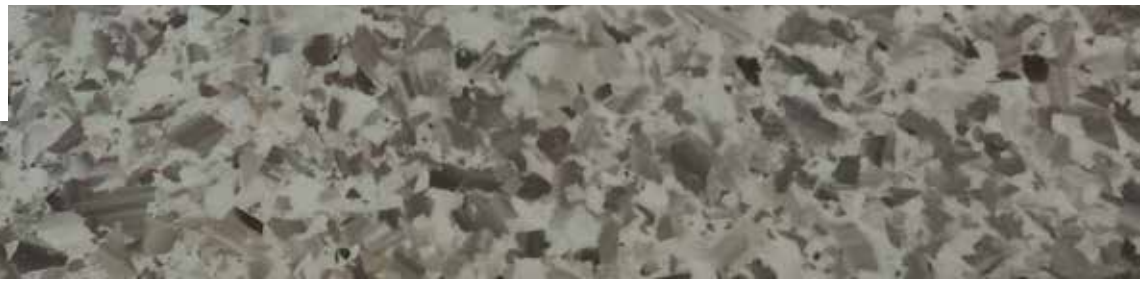

LATEST COLOURS




Bamboo



Black Granite




Carnivale



Claypan



Coppertone




Fiesta



Fossil




Freckle



Frosty




Glacier



Grey Granite




Latte




Moonlite




Oatmeal




Oyster



Paprika



Safron



Sandalwood



Savannah



Seashell




Sherbert




Showtime



Storm



Sunset

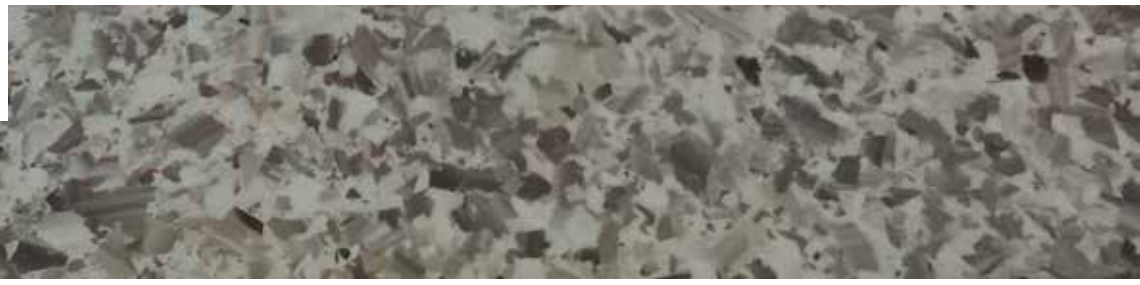


STANDARD FLAKE RANGE



Ash Grey (L)




Ash Grey (S)




Champagne (L)




Champagne (S)



Desert Grey (L)




Desert Grey (S)




Driftwood (L)




Driftwood (S)



Eastwick (L)



Eastwick (S)



Fox (L)



Fox (S)



Fruit Salad (L)




Fruit Salad (S)




Grenadine (L)



Grenadine (S)



Grey Mist (L)



Grey Mist (S)



Greywacke (L)




Greywacke (S)



Honeycomb (L)



Honeycomb (S)




Sahara (L)




Sahara (S)




Snowfield (L)



Snowfield (S)



Steel (L)



Steel (S)



PROCRETE
POLYMER FLOORING

Call us today
for a free quote
p. 07 5593 6884

