
DECORATIVE EPOXY FLOORING









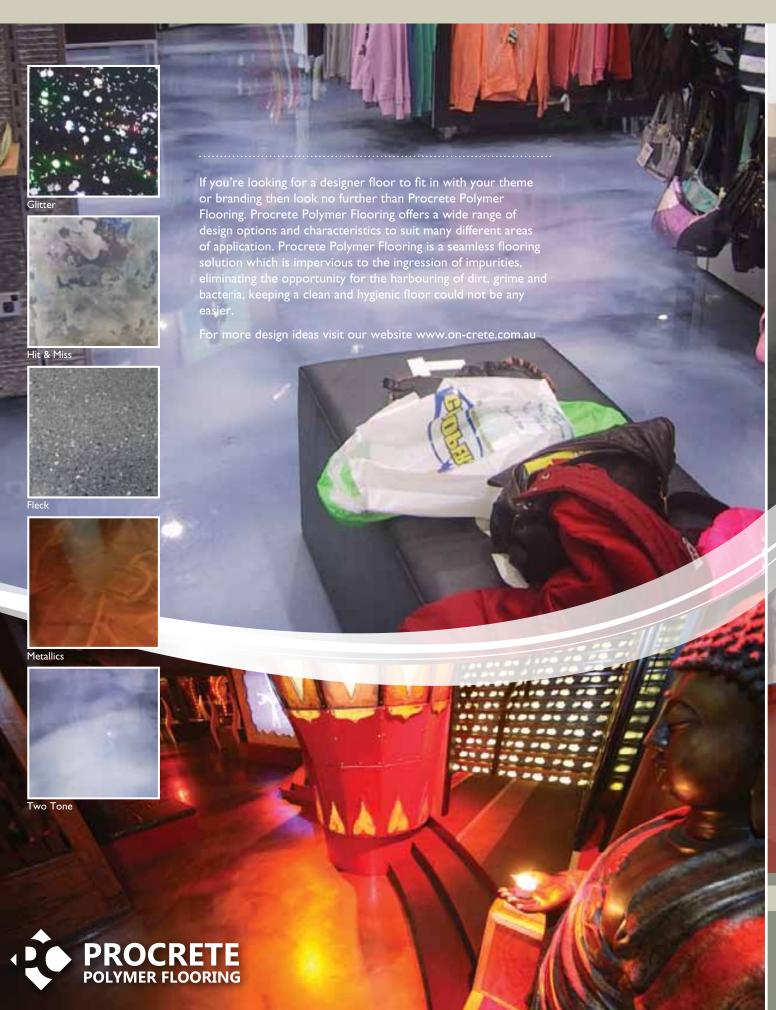

Preparing new floor for a meat processing plant and coating with SVI00

SV100

SVI00 TWO PACK EPOXY

Is a 100% solids two pack epoxy system free from solvent and water, can be used as a pigmented coating for concrete floors, as a binder for high build sand filled epoxy floor coatings 2-6mm thick.

Is highly suitable for hospitals, commercial kitchens, laboratories and cool rooms for its hygiene properties and food processing industries, garage or work shop floors because of its high chemical resistance.

It is also compatible with On-Crete's Coving material for a seamless finish between your flashbacks and floor.



Mushroom



Sahara Sand



Terracotta

Sunshine Ivory

Sunshine GB

Brick Red





Nutmeg





SVI00 COLOUR CHART









www.on-crete.com.au

Please contact us for more information:

Unit 4/489 Scottsdale Drive, Varsity Lakes, QLD 4227 sales@on-crete.com.au (07) 5593 6885

PLEASE NOTE: The colours shown are to be used as a guide only.
Colours are reproduced as closely

ON-CRETE AUSTRALIA PTY LTD

Procrete Polymer Flooring

-10





FLAKE

PROCRETE POLYMER FLAKES incorporated in seamless epoxy and polyurethane floor systems are a great alternative to other types of floor / wall coverings. The decorative flakes are colourful, tough, low maintenance, seamless, durable and hygienic coating systems for floors, walls and other surfaces for commercial, institutional and domestic areas.


Procrete flake flooring is extremely durable and has a long lasting floor surface. The polymers used give abrasion and impact resistance and when used with a high performance urethane as topcoats form an extremely durable and long lasting floor surface.


BENEFITS TO FLAKE:

- > Seamless Surface
- > Graffiti Resistant
- > Water Resistant
- > Great for High Traffic Areas


> Will not harbour Bacteria

STANDARD FLAKE RANGE













ON-CRETE
AUSTRALIA PTY LTD





SV50 TWO PACK EPOXY

Is a 50% Solids two pack water base epoxy, comes as a white base which needs to be tinted to colour of choice. Is used as a commercial concrete coating (paint) also as a coloured base coat for flake flooring. When mixed with Slip Reducing Additive it can be used as an anti-slip floor coating.

For more information go to our website and download the



SV50 COLOUR CHART

Blue Gum Driftwood Forest Green Blue Lagoon Ash Grey Terracotta Nutmeg Mid Grey Dark Red Chocolate

Caramel

PLEASE NOTE: The colours shown are to be used as a guide only. Colours are reproduced as closely as modern printing techniques

